DECOPLAN WALL

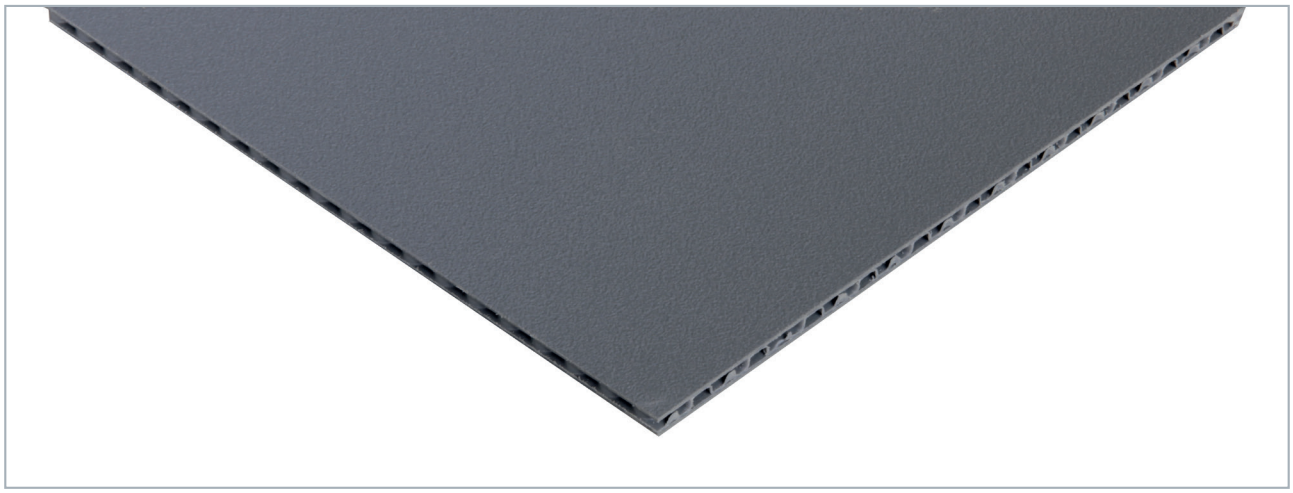

Description

DECOPLAN® WALL powerd by CON-PEARL®

is the plastic honeycomb panel for transporter interior fittings. The sealed surface makes it esy to clean. The high-grade plastic honeycomb panel is used for side panelling and adapts perfectly to the shape and colour of the vehicle interior

Technical data	Property	Unit	Value	Test method
DECOPLAN® WALL	Weight per unit area	kg/m2	1,7 +/- 0,05	DIN EN 12127
	overall thickness	mm	4,8 +/- 0,2	DIN EN ISO 5084
	Crack resistance	N/50mm	> 1800	ISO 52-2
	Bending force at 3% elongation	N/50mm	> 20	3-point benidng, distance between supports 140mm, 20mm/min
	Maximum bending force (F max)	N/50mm	> 67	
	Bending at F max	mm	< 43	
	Burning rate	mm/min	< 75	DIN 75200 (FMVSS 302)
	Resistance to cold	°C	- 10	VW-PV3905: ball droptest (500g,h=250mm)

Subject to design modifications. Important: reference values - these properties are not guarenteed, subject to technical modifications.



Tel. +49 5242 17-5363
www.westag.com
baeumker@westag.com

Date: October 2019