



Westaspan 300 is suitable for all smooth, jointless concrete surfaces in accordance with DIN 18020/3, line 4/5. Limited number of reuses.

Westaspan 300

- Low-cost supersize formwork panel
- Highly compacted wooden composite substrate P5
- Melamine resin film coating 300g/m² on each side
- Sealed edges



TECHNICAL DATA


Technical data	Dimensions mm	Thickness mm	Weight kg/m ²	Modulus of elasticity (N/mm ²)		Bending strength (N/mm ²)	
				Along	Across	Along	Across
Westaspan 300	5500 × 2000	18	13	3500	3500	17	17
	5500 × 2000	21	14.5				
	2500 × 1250	20	14				

Subject to design modifications

Attention Reference values – these properties are not guaranteed

Dimensions pre-edged (approx. specification)

Diagram for bending estimation

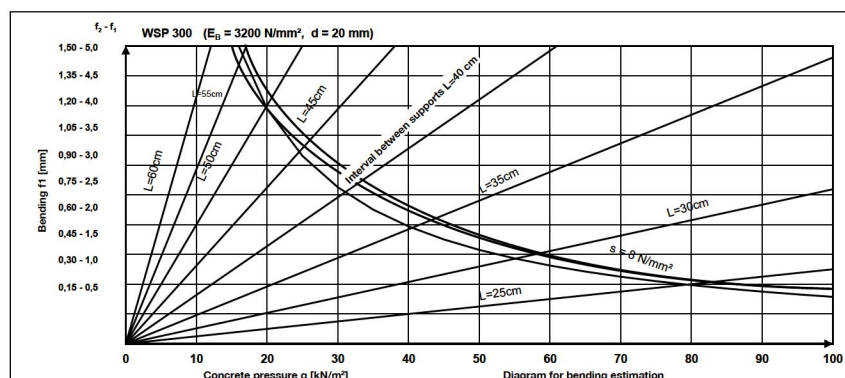

Förderung nachhaltiger
Waldwirtschaft
www.pefc.de

Tel. +49 5242 17-1000
Fax +49 5242 17-71000
www.westag-getalit.com
sp.vertrieb@westag-getalit.com

Date: October 2017
Order No. 4-078 768

**WESTAG &
GETALIT AG**