




Westaspan Super 400 is suitable for all smooth, jointless concrete surfaces in accordance with DIN 18202/3, line 5/6.

Use with exposed concrete requirement SB3 and multiple reuse.

Westaspan super 400

- Supersize formwork panel made of special 3-ply wooden composite substrate for exposed concrete requirements up to SB 3
- Melamine resin film coating 400g/m² on each side
- Sealed edges

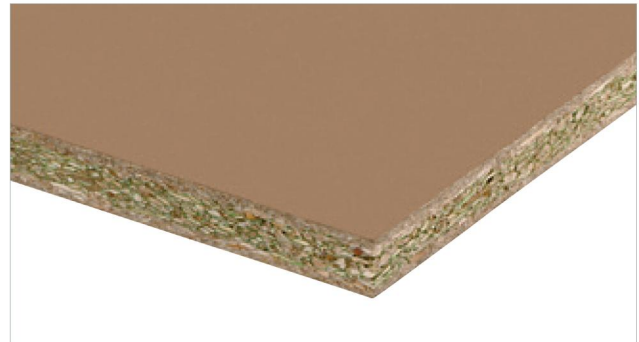


TECHNICAL DATA

Technical data	Dimensions mm	Thick-ness mm	Weight kg/m ²	Modulus of elasticity (N/mm ²)		Bending strength (N/mm ²)	
				Along	Across	Along	Across
Westaspan super 400	5500 × 2000	21	15	4900	4500	40	34

Subject to design modifications

Attention Reference values – these properties are not guaranteed

Diagram for estimating the bending of the 21 mm panel

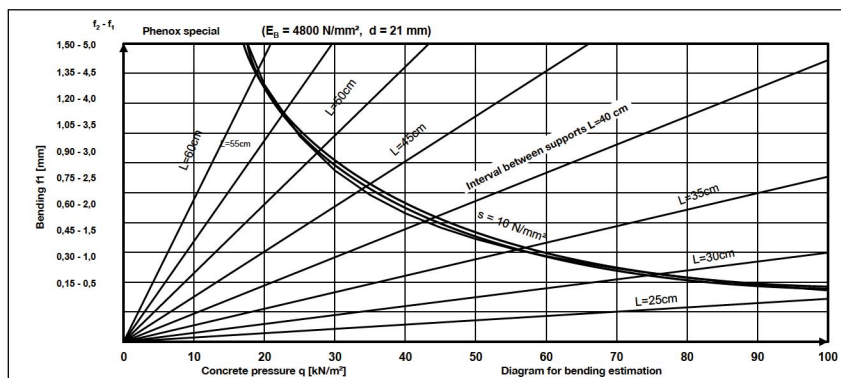

Förderung nachhaltiger
Waldwirtschaft
www.pefc.de

Tel. +49 5242 17-1000
Fax +49 5242 17-71000
www.westag-getalit.com
sp.vertrieb@westag-getalit.com

Date: October 2017
Order No. 4-078 768

