


WestaLack® Care instructions

For doors with lacquer finish

Individualists with a penchant for elegant, semi-matt gleaming surfaces choose our lacquers: Interior doors with lacquer finishes. Available in two basic colours and if requested, in any of the colours listed on the RAL, NCS or ACC colour charts. To protect both people and the environment, we only use environmentally friendly, water-based lacquers and solvent-free UV acrylic lacquers.

Structure of the WestaLack finish

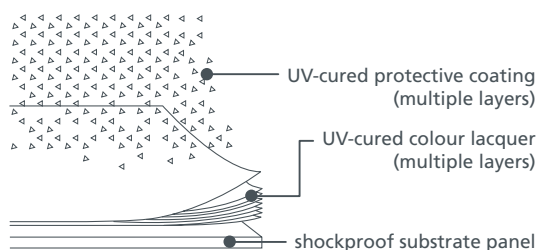

Care

Slightly dirty doors can be cleaned using a cham-
ois leather or a damp cloth. If WestaLack doors are particularly dirty, it is best to use clean water and/or a soapy solution. Furniture polishes, waxes and similar products should not be used. Disinfectants such as Sterillium should only be used to clean the door handle and should not be allowed to get on the surface of the door.

General recommendations

In smoking areas, you can prevent yellow nicotine staining on individual elements (edges, seals, architraves, etc.) by cleaning the doors regularly. We recommend cleaning laminate surfaces once every three months. Adhesive tapes, such as those used when renovating or painting, should be removed again as soon as possible. If adhered for a longer period of time, the adhesive may damage the decor.

WestaLack surface properties



abrasion
resistant



temperature
resistant



lightfast



stainproof



resistant to
gentle clean-
ing agents